



FEEL THE SW
DIFFERENCE®

DESIGNED TO ENHANCE WORKER PERFORMANCE.



PF-95TL

POWDER-FREE ECOTEK SUSTAINABLE
NITRILE EXAMINATION GLOVES*

**VERSATILE SUSTAINABLE 5 MIL SINGLE-USE
GLOVE COMBINES MAXIMUM COMFORT AND
CONTROL WITH HIGH-QUALITY CONSTRUCTION**

- EcoTek® Sustainable Technology*
- Silicone-free for critical environments
- Exceeds 1.5 AQL laboratory standards

PF

PF-95TL

WEIGHT	LENGTH	THICKNESS	FEATURES	COLOR
 6.5g (large size)	 9.5"	 5.0 mil	EcoTek® Clean Washed Air Inspected	 TEAL


ECOTEK



Optimal
thickness for
durability and
tactile sensitivity

Fully textured
surface for wet
and dry grip

Tear-resistant
beaded cuff for
easy donning

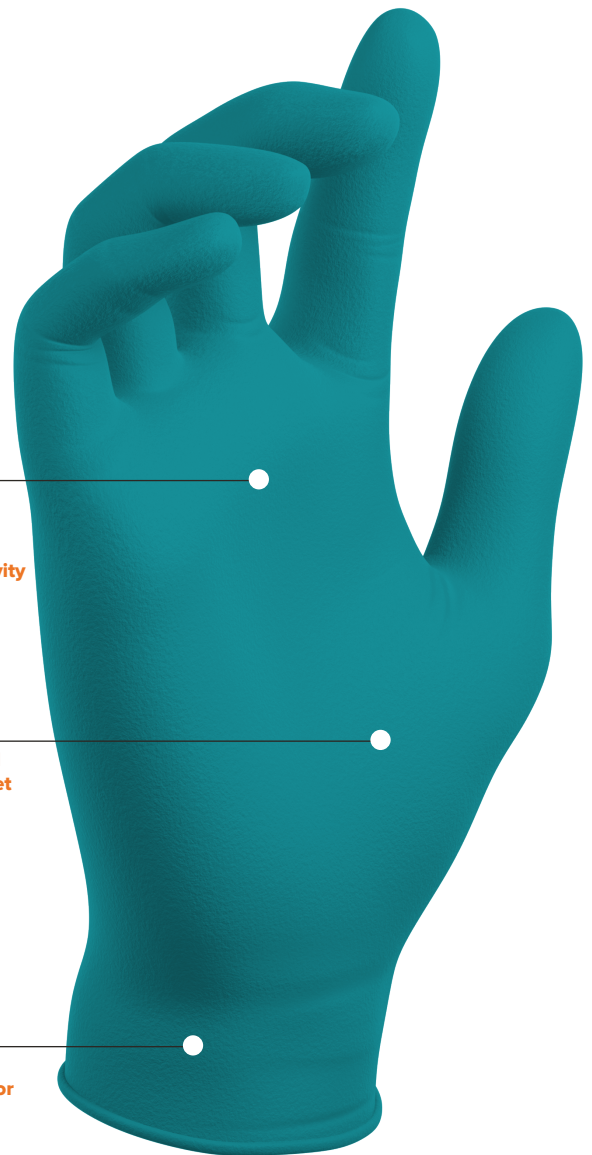

SW®
33278 Central Avenue, Unit 102, Union City, CA 94587, USA
Tel: +1.510.429.8692 | Fax: +1.510.487.5347
Trademarks and registered trademarks are the property of SW and its affiliates.
©2023 SW. All rights reserved.



TECHNICAL DATA



PowerForm®

PF-95TL

**POWDER-FREE ECOTEK SUSTAINABLE
NITRILE EXAMINATION GLOVES***

PRODUCT DESCRIPTION

SPECIFICATIONS

PRODUCT		PowerForm®	
GRADE		Powder-Free Exam	
MATERIAL		Nitrile	
THICKNESS	FINGER	5.8mil	0.15mm
	PALM	5.0mil	0.13mm
	CUFF	3.9mil	0.10mm
COLOR		Teal	
SURFACE		Fully Textured	
LENGTH		9.5"	242mm
WEIGHT		6.5g	
FIT TYPE		Ambidextrous	
CUFF TYPE		Beaded	
WATERTIGHT AQL		1.5	
ORIGIN COUNTRY		China	

PHYSICAL PROPERTIES

	PRE-AGING	POST-AGING
TENSILE		
STRENGTH:	21 MPA	20 MPA
ELONGATION:	560%	540%

INTEGRATED TECHNOLOGIES

ECOTEK Sustainable Technology: Product has been tested per ASTM D5526*

100% Air Inspected

Clean Washed



* Specifications based on size Large glove

STANDARDS & CERTIFICATIONS

EN ISO 21420:2020
EN 455-2000-2015
ASTM D6319-19
ASTM D6978-05 (2019)
ASTM F1671-13
ASTM F739-12
Reach EU 1907/2006

EU 2016/425
CAT III Complex Design

CE 0493



EN ISO 374-1:2016/TYPE B



EN ISO 374-5:2016



Please visit swssglobal.com/symbols for information on standards used on this document.

ORDERING

ITEM NO.	SIZE	PALM WIDTH	PACKAGING
N200361	XS 5½ – 6	3.0" 75mm	100 gloves per box 10 boxes per case
N200362	S 6½ – 7	3.5" 89mm	100 gloves per box 10 boxes per case
N200363	M 7½ – 8	3.8" 98mm	100 gloves per box 10 boxes per case
N200364	L 8½ – 9	4.3" 108mm	100 gloves per box 10 boxes per case
N200365	XL 9½ – 10	4.6" 116mm	100 gloves per box 10 boxes per case
N200366	2XL 10½ – 11	4.9" 124mm	100 gloves per box 10 boxes per case

APPLICATIONS

For Medical Use
Chemical Handling

Keep out of sunlight. Store in a cool, dry place.
Keep away from sources of ozone or ignition.



10°C / 30°C

R_N20036X0323



SW®
33278 Central Avenue, Unit 102, Union City, CA 94587, USA
Tel: +1.510.429.8692 | Fax: +1.510.487.5347
Trademarks and registered trademarks are the property of SW and its affiliates.
©2023 SW. All rights reserved.



*EcoTek gloves tested to ASTM D5526-12 Standard Test Method for Determining Anaerobic Biodegradation of Plastic Materials Under Accelerated Landfill Conditions. Results are 92.6% biodegradation in 60% solids landfill at 945 days. Future results cannot be predicted/extrapolated. If you need more information on the test reports, send email to cs@swssglobal.com.