

**RTZN3D**


**NINJA HEAVY DUTY POSITIONING CONSTRUCTION FORMING HARNESS**

The Heavy-Duty Positioning Construction Forming Harness is a cutting-edge safety solution designed to provide optimal support and protection for workers in construction and similar industries. Packed with advanced features and compliance with industry standards, this harness ensures both safety and comfort on the job. It features 3 D-rings, an integrated SRL connector, 5 adjustment points, lanyard parking loops, and ergonomic padding. From high-rise building construction to complex formwork projects, this harness enhances worker safety and maneuverability.



**FEATURES**

- Triple D-Ring Configuration: One dorsal attachment D-ring for fall arrest and two lateral D rings at waist level for positioning
- Integrated SRL Connector
- Optimal Adjustment
- Lanyard Parking Loops
- Enhanced Comfort
- Adjustable leg straps
- Equipped with Waist pad & Removable shoulder pad

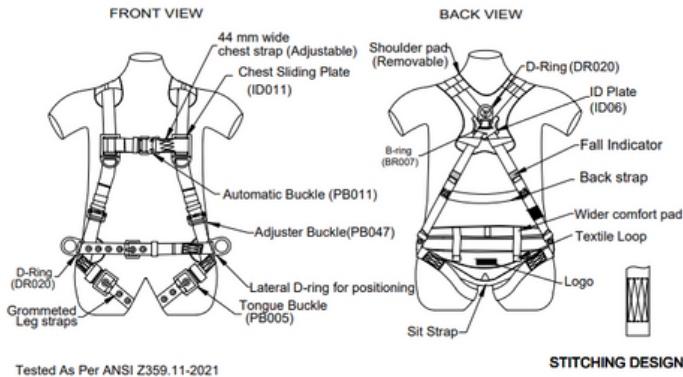

**SIZES:**

- SM: 5.886 lbs ± 0.1 lbs
- MD: 5.908 lbs ± 0.1 lbs
- XL: 5.974 lbs ± 0.1 lbs
- 2X: 5.610 lbs ± 0.1 lbs
- 3X: 6.150 lbs ± 0.1 lbs
- LG: 5.930 lbs ± 0.1 lbs

**STANDARDS**

As Per ANSI Z359.11-2021

**TECH SPECS**

<b>Webbing Material</b>	Polyester
<b>Weight Limit</b>	420lbs (ANSI - 310lbs/OSHA 420lbs)
<b>Webbing Width</b>	44±1mm
<b>Breaking strength</b>	5000 lbs
<b>Stitching Thread Material</b>	High-tenacity Polyester
<b>Metal Component Material</b>	Alloy Steel
<b>Metal Component Finish</b>	Silver or Golden Yellow Galvanized
<b>Static Strength</b>	3600 lbs for 1 minute
<b>Dynamic performance</b>	The upper ring of a dummy of 100 kg mass is raised to a height which allows to generate a 16kN force above the anchorage point for a free fall